
Xotic AC Booster V2

User Manual

Newly designed AC Booster V2 offers a wide range of overdrive with touch sensitivity (reacting exactly like a great tube amp) just like the original AC. You can set it up to get a crunchy warm overdriven tone and with just a little rolling off of the guitar's volume, it will give you a great clean sound. The Gain #1 channel consists of Volume, Gain, Treble and Bass knobs. Additionally, there is a 4 pole dipswitch on the side of the pedal which further allows more "tone" shaping at your fingertips. With the Gain #2 channel engaged, there is a plenty of gain available on tap. Throughout all the settings, the ACB-V2 offers a musical tonal balance with a great versatility.

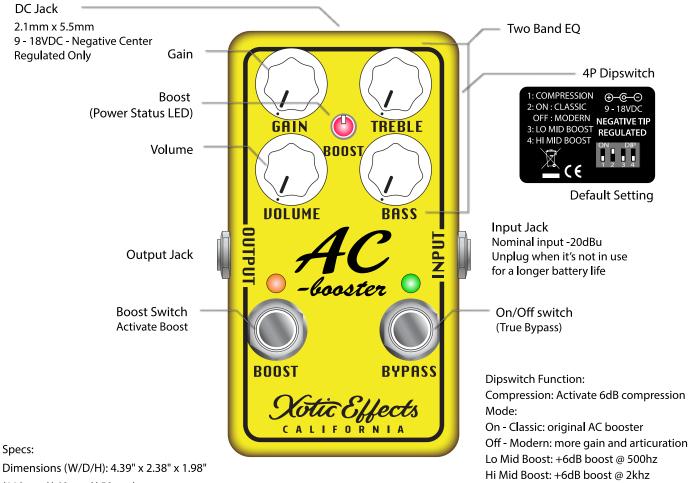

(110mm X 60mm X 50mm) Weight: 0.6 lbs. (270g) True Bypass Switching

Power Consumption: 9VDC/10mA (max)

Approx. 40hrs continuous use with alkaline battery

Battery Type: 9VDC (006P) x 1 AC Adapter (Optional): 9-18VDC Negative Tips (Regulated Only)


Boss PSA, Ibanez AC109, Dunlop Brick, Voodoo Labs,

Input Impedance: 1M ohm Output Impedance: 2K ohm

When an external power supply is used, the battery is disconnected from the circuit

Remove four screws from the bottom plate to access battery

Treble and Bass Control Range



XVIIC Effects

14920 Calvert Street Van Nuys, CA 91411 USA support@xotic.us