

Ep-booster

DISCRETE PRE-AMP

Congratulations on purchasing the NEW Xotic EP-Booster!! The EP-Booster is a discrete FET preamp with low impedance output providing up to +20db of unadulterated boost that's multi-dimensional with shimmering highs and lows. The internal DIP switches let you choose the boost frequencies and EQ setting. The EP-Booster can be powered by 9-volt up to 18-volts for desired headroom.



Specs:

Dimensions (W/D/H): 3.5" x 1.5" x 1.5"
(89mm X 38mm X 38mm)

Weight: 0.57 lbs. (260g)

True bypass switching

Power consumption: 9VDC/5mA

Battery type: 9VDC (006P) x 1

AC adapter (optional): 9VDC-18VDC
standard 2.1mm x 5.5mm barrel plug
negative center



regulated recommended

Input impedance: 1M ohm

Output impedance (min): 2K ohm

Output Level (max): 0 dBu

For more information about our products,
visit www.xoticeffects.com

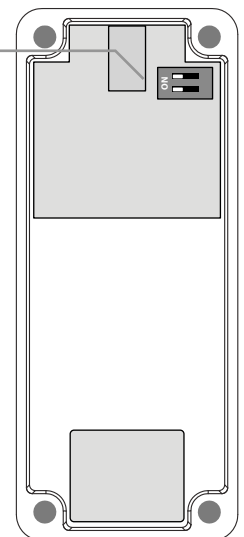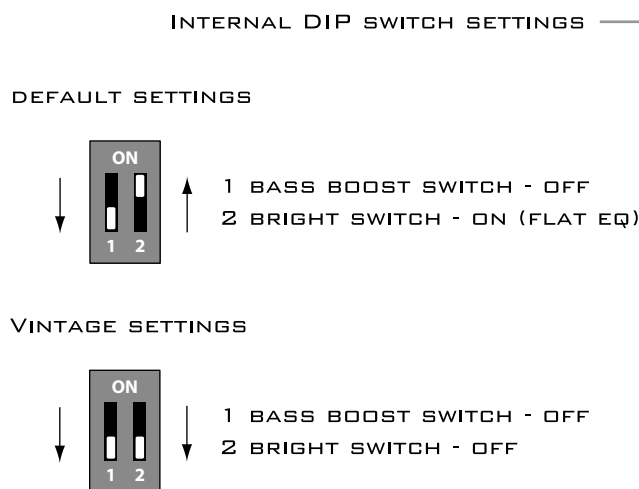

Inside view